

UHF Alien Higgs-3 Credentials



Datasheet

Introduction

Rosslare offers a large selection of high-quality, long-lasting credentials that are compatible with today's most popular devices and are recognized for their high number of possible reads. The UHF Alien Higgs-3 smart card credentials are ISO18000-6C (EPC GEN2) compliant UHF passive credentials and are ideally suited for a variety of applications and environments while keeping the solution cost-effective.

General Description

The UHF Alien Higgs-3 smart card credentials have a great reading distance and are ideal for hands free and no-touch operation.

The UHF credentials are available as an ISO card, a hard tag, a paper label, or as a glass inlay. The ISO card and paper label can be directly printed on the card by inkjet. The hard tag has engraved numbers on it.

Main Features

- EPC Class 1 Gen 2, ISO 18000-6C
- 64 Byte memory
- ISO Card – Single and dual technology, laminated card that combines UHF with MIFARE RFID for a credential that can be read by a MIFARE reader as well as a UHF reader. These function by holding the card within range of the reader.
- Tamper proof labels for use on glass – These operate when the tag is mounted unobstructed on the inside of a glass window, such as the front windshield of a vehicle
- UHF Hard Tags – Designed for mounting on a metal surface. These plastic hard tags are made out of high quality plastics and are fully potted and rugged for indoor and outdoor use (IP68).
- ISO card and paper label form factors with optional inkjet printing
- Hard tag form factor with engraved numbers on it
- Glass inlay tag form factor with optional inkjet printing

Catalog List

Part Number	Type	Memory Size	Form Factor	Credential Format	ID Printing
LT-UVS-26A-3000	Programmed	64 Bytes	ISO Card (PVC)	Wiegand 26-bit	Inkjet - FC & Card ID (decimal)
LT-UVH-26A-7000	Programmed	64 Bytes	Hard Tag	Wiegand 26-bit	Laser Engraving - FC & Card ID (decimal)
LT-UVH-26A-3100	Programmed	64 Bytes	Hard Tag	Wiegand 26-bit	Laser Engraving - FC & Card ID (decimal)
LT-UVG-26A-3001	Programmed	64 Bytes	Glass Inlay	Wiegand 26-bit	Inkjet - FC & Card ID (decimal)
LT-UVT-26A-3001	Programmed	64 Bytes	Tamper Paper Label	Wiegand 26-bit	Inkjet - FC & Card ID (decimal)
AT-UVT-000-0001	Not Programmed	64 Bytes	Tamper Paper Label	Not Programmed	No ID Printed
AT-Z4S-000-0001	Not Programmed	4K MIFARE 64 Bytes UHF	ISO Card (PVC)	Not Programmed	No ID Printed

Technical Specifications -UHF ISO Card

OPERATING	LT-UVS-26A-3000	AT-Z4S-000-0001
Frequency	860 MHz to 960 MHz	820 MHz to 980 MHz and 13.56MHz
Read Range	12 m (39.4 ft)	12 m (39.4 ft)
ENVIRONMENTAL	LT-UVS-26A-3000	AT-Z4S-000-0001
Operating Temperature Range	-10°C to 50°C (14°F to 122°F)	-10°C to 50°C (14°F to 122°F)
Operating Humidity Range	0% to 90% (non-condensing)	0% to 90% (non-condensing)
Operating Storage Range	-10°C to 50°C (14°F to 122°F)	-10°C to 50°C (14°F to 122°F)
PHYSICAL	LT-UVS-26A-3000	AT-Z4S-000-0001
Material Type	PVC	PVC
Color	White	White
Surface Finish	Glossy	Glossy
Dimensions (H x W x D)	85.6 × 54.0 × 0.8 mm (3.37 x 2.13 x 0.03 in.)	85.6 × 54.0 × 0.8 mm (3.37 x 2.13 x 0.03 in.)
Weight	5.8 g (0.2 oz)	5.8 g (0.2 oz)


Technical Specifications - UHF Tamper Paper Label and Glass Inlay

OPERATING	Paper Label	Glass Inlay
Frequency	802 MHz to 927 MHz	860 MHz to 960 MHz
Read Range	10 m (32.8 ft)	10 m (32.8 ft)
Memory Allocation		
ENVIRONMENTAL	Paper Label	Glass Inlay
Operating Temperature Range	-25°C to 50°C (-13°F to 122°F)	-40°C to 70°C (-40°F to 158°F)
Operating Humidity Range	0% to 90% (non-condensing)	20% to 90% (non-condensing)
Operating Storage Range	-25°C to 50°C (-13°F to 122°F)	-20°C to 50°C (-4°F to 122°F)
PHYSICAL	Paper Label	Glass Inlay
Material Type	Paper	Paper
Color	White	White
Surface Finish	Paper	Glossy
Dimensions (H x W x D)	86 x 54 mm (3.39 x 2.13 in.)	97 x 27 mm (3.82 x 1.06 in.)
Weight	2.6 g (0.1 oz)	0.75 g (0.03 oz)


Technical Specifications - UHF Hard Tag

OPERATING	LT-UVH26A-7000	LT-UVH-26A-3100
Frequency	902 to 927 MHz	866 to 868 MHz
Read Range	8 m (26.2 ft)	10 m (32.8 ft)
Memory Allocation		
ENVIRONMENTAL	LT-UVH26A-7000	LT-UVH-26A-3100
Operating Temperature Range	-20°C to 60°C (-4°F to 140°F)	-30°C to 80°C (-22°F to 176°F)
Operating Humidity Range	0% to 90% (non-condensing)	0% to 90% (non-condensing)
Operating Storage Range	-40°C to 80°C (-40°F to 176°F)	-30°C to 80°C (-22°F to 176°F)
PHYSICAL	LT-UVH26A-7000	LT-UVH-26A-3100
Material Type	ABS	ABS
Color	Black	Black
Surface Finish	Texture	Texture
Dimensions (H x W x D)	79 x 31 x 9.5 mm (3.11 x 1.22 x 0.4 in.)	84 x 21 x 9.5 mm (3.31 x 0.83 x 0.4 in.)
Weight	20 g (0.7 oz)	15 g (0.5 oz)


ISO Card

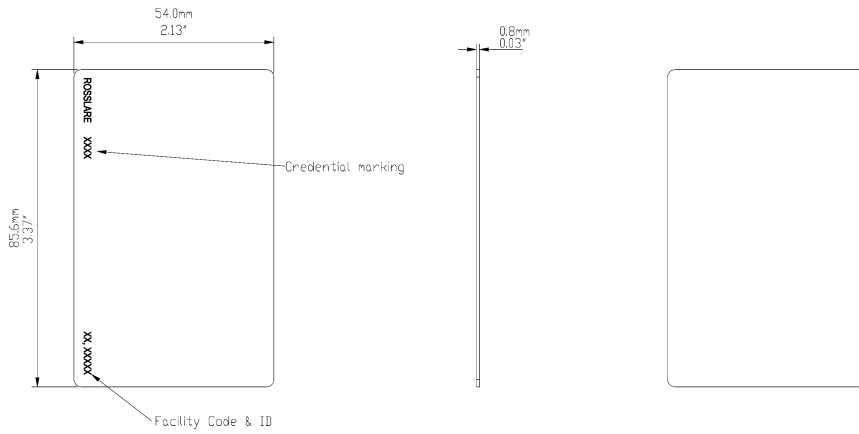


Hard Tag - LT-UVH-26A-7000

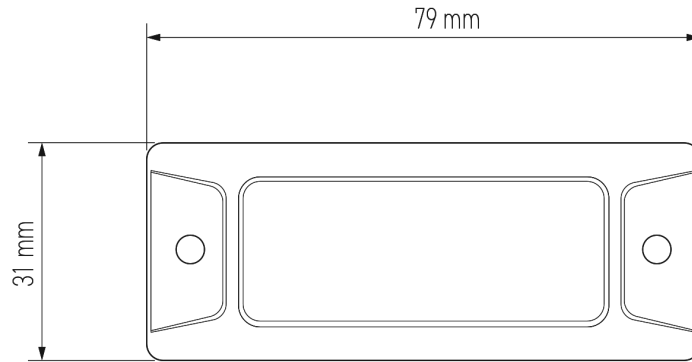

Hard Tag - LT-UVH-26A-3100

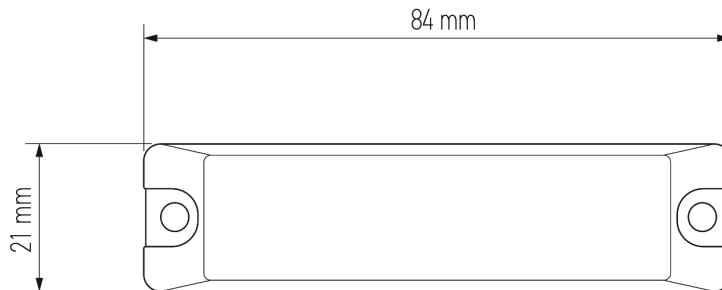

Paper Label

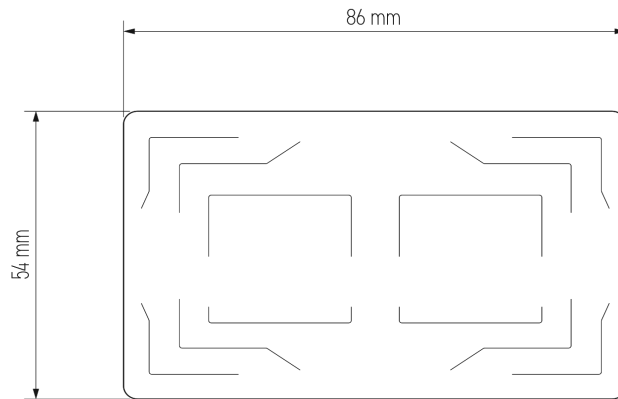

• EN ISO 13485



MIFARE and MIFARE Classic are trademarks of NXP B.V. | MIFARE and DESFire are registered trademarks of NXP B.V. | MIFARE and MIFARE Plus are registered trademarks of NXP B.V. | MIFARE and MIFARE Ultralight are registered trademarks of NXP B. V. | All product names, logos, and brands are property of their respective owners.

DISCLAIMER: The data contained within Rosslare's materials or documentation is intended to provide only general information about products available for purchase from Rosslare Enterprises Ltd. and its associated companies ("Rosslare"). Reasonable efforts have been made to ensure the accuracy of this information. However, it might contain typographic errors, inaccuracies, or omissions that may relate to product descriptions, visual pictures, specifications, and other details. All technical specifications weights, measures and colors shown, are best approximations. Rosslare can not be held responsible and assumes no legal liability for the accuracy or completeness of the information provided. Rosslare reserves the right to change, delete, or otherwise modify the information, which is represented, at any time, without any prior notice.

© 2022 Rosslare Enterprises Ltd. All rights reserved.

For more information regarding support, visit <https://support.rosslaresecurity.com>.